


RIDGE & FLORA SERIES

Premium 600x600 mm Designer Tiles

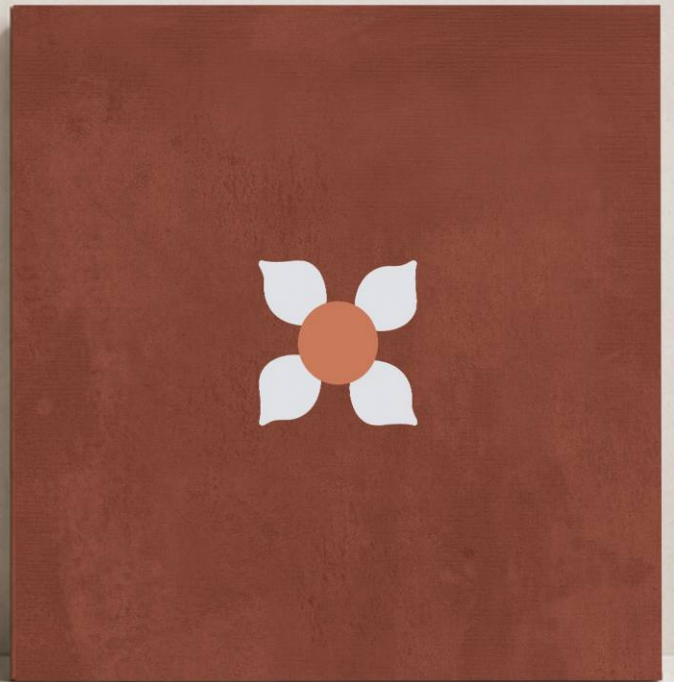

Stone-Look & Decorative Collections

600x600MM

Ridge Series (Matt Punch)



Ridge Crema

6 Phases



600x600MM

Ridge Series (Matt Punch)



Ridge Caffè

6 Phases

600x600MM

Ridge Series (Matt Punch)



Ridge Cotto

6 Phases

600x600MM

Ridge Series (Matt Punch)



Ridge Olive

6 Phases



600x600MM

Ridge Series (Matt Punch)




Ridge Verde

6 Phases

600x600MM

Ridge Series (Matt Punch)

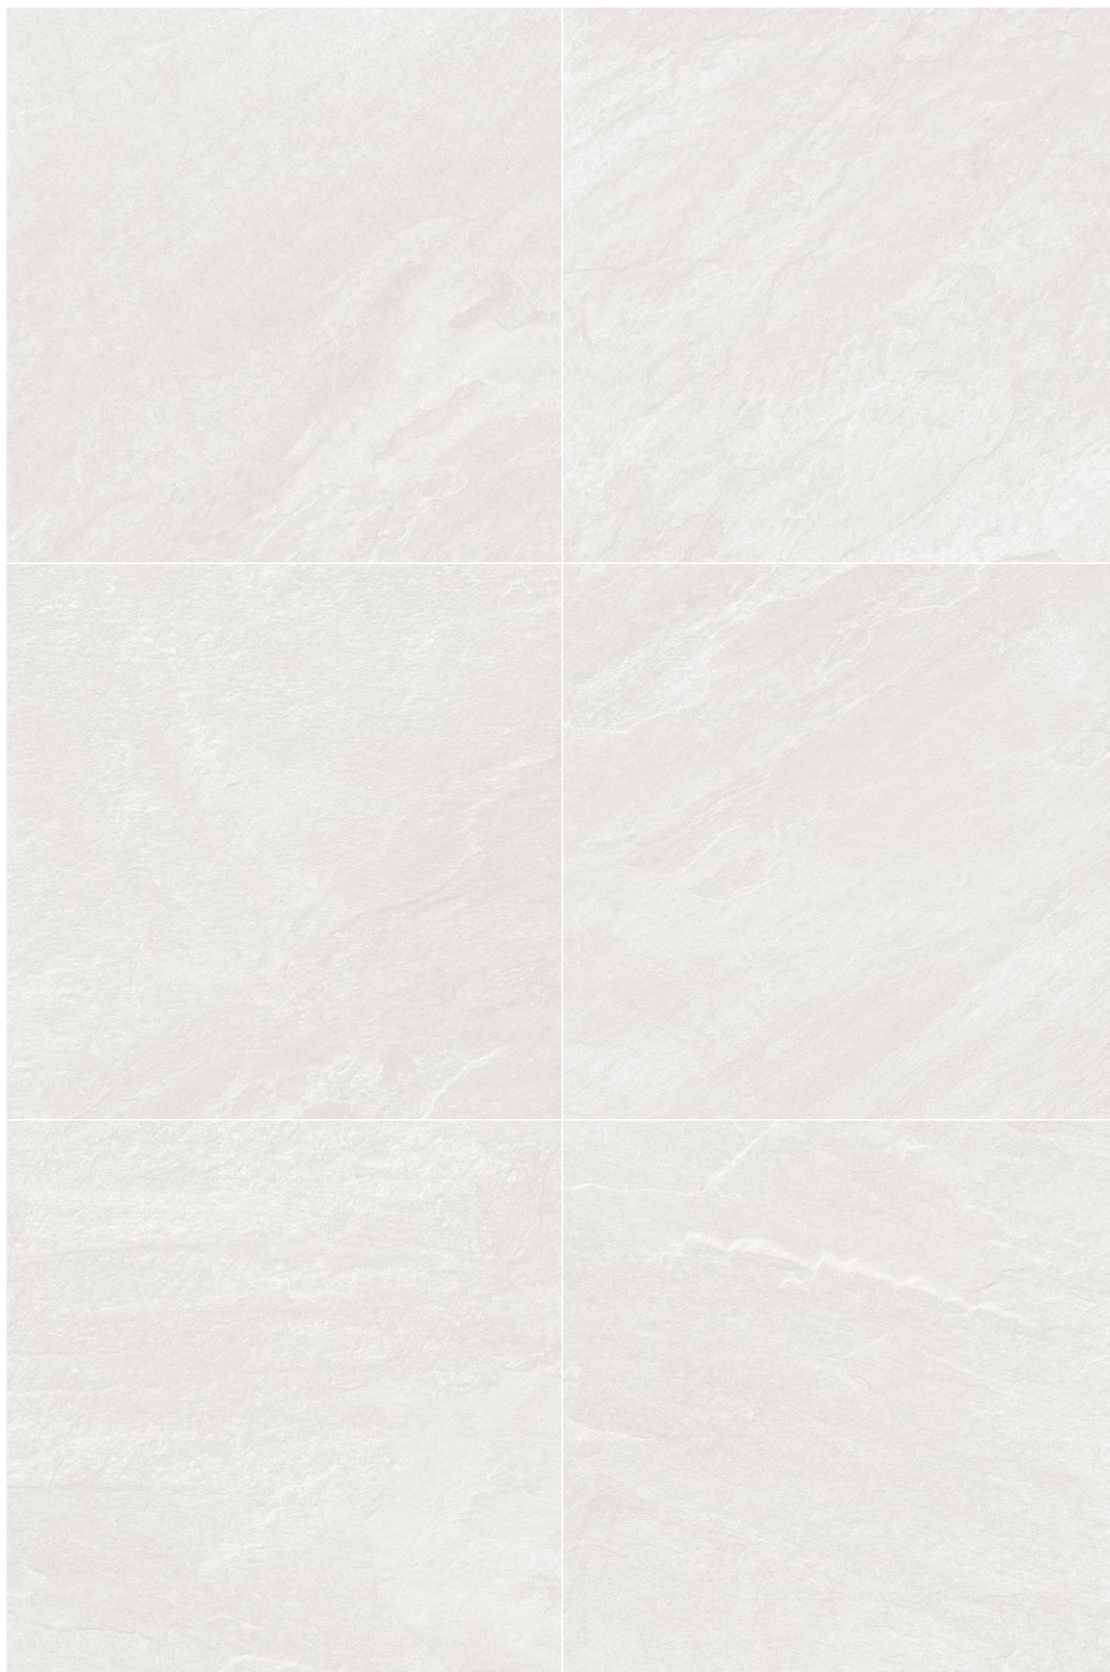


Ridge Bianco

6 Phases

600x600MM

Ridge Series (Matt Punch)

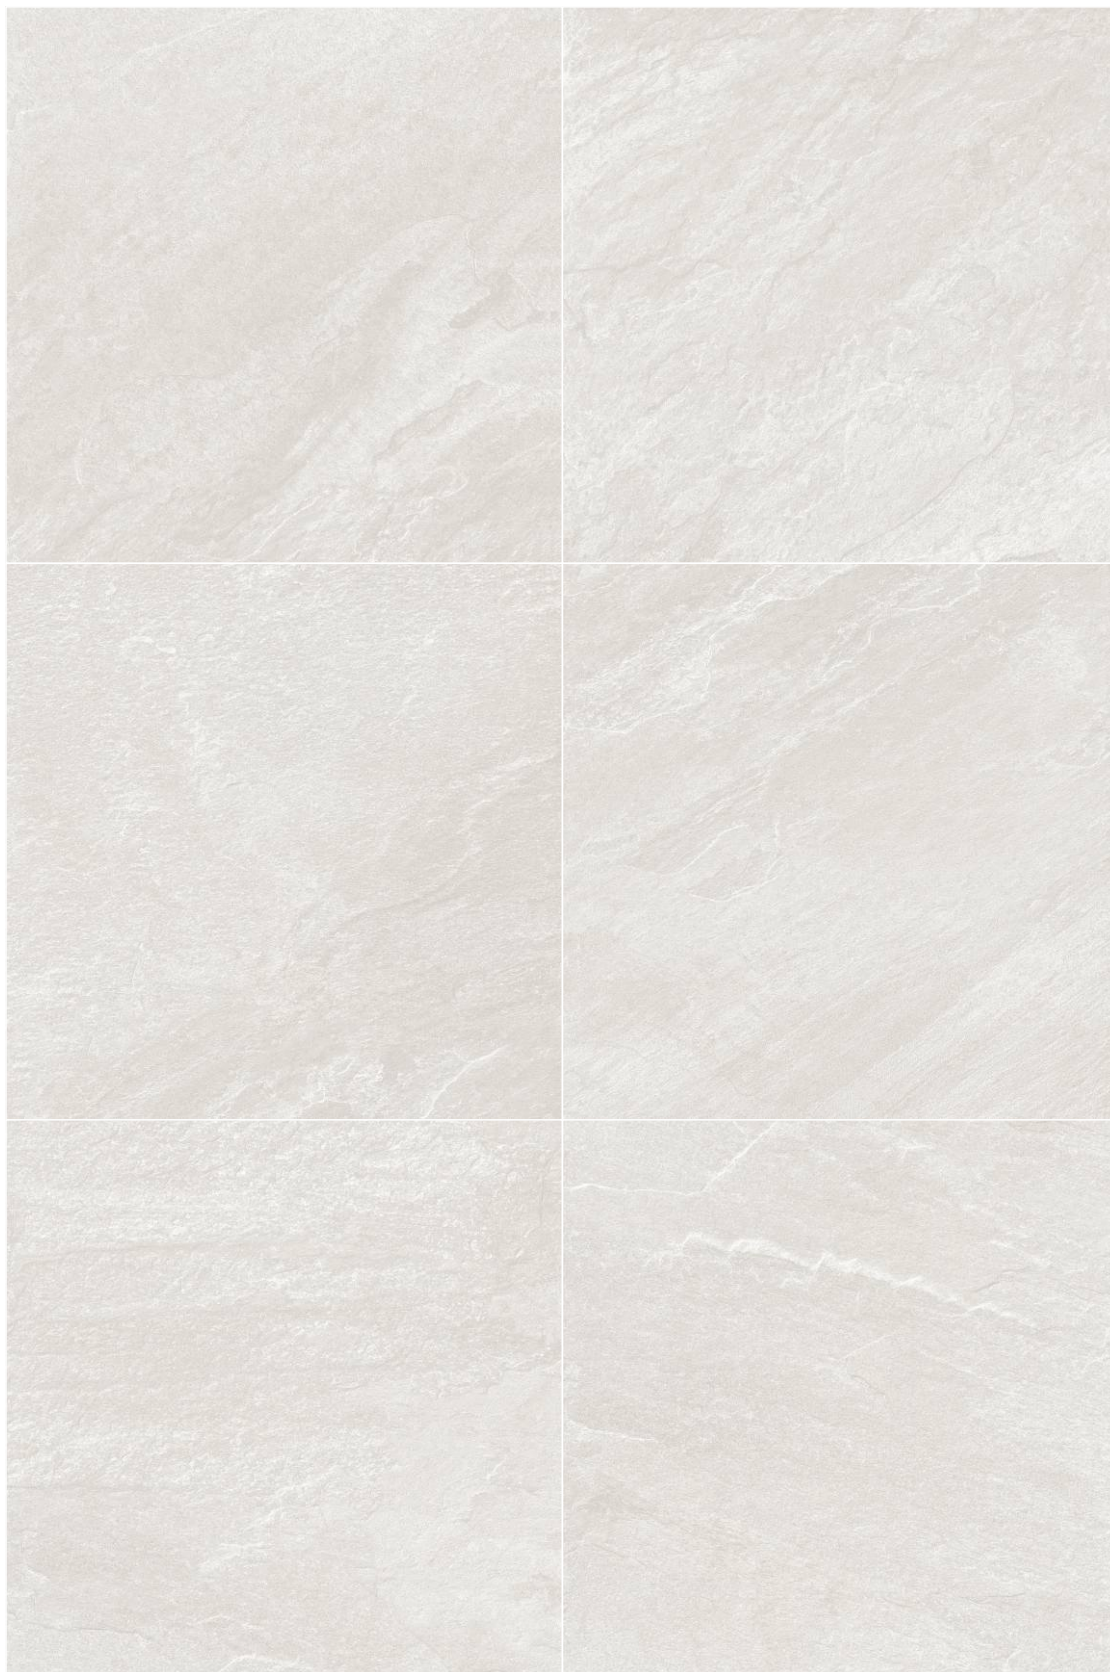


Ridge Pearl

6 Phases



600x600MM

Ridge Series (Matt Punch)

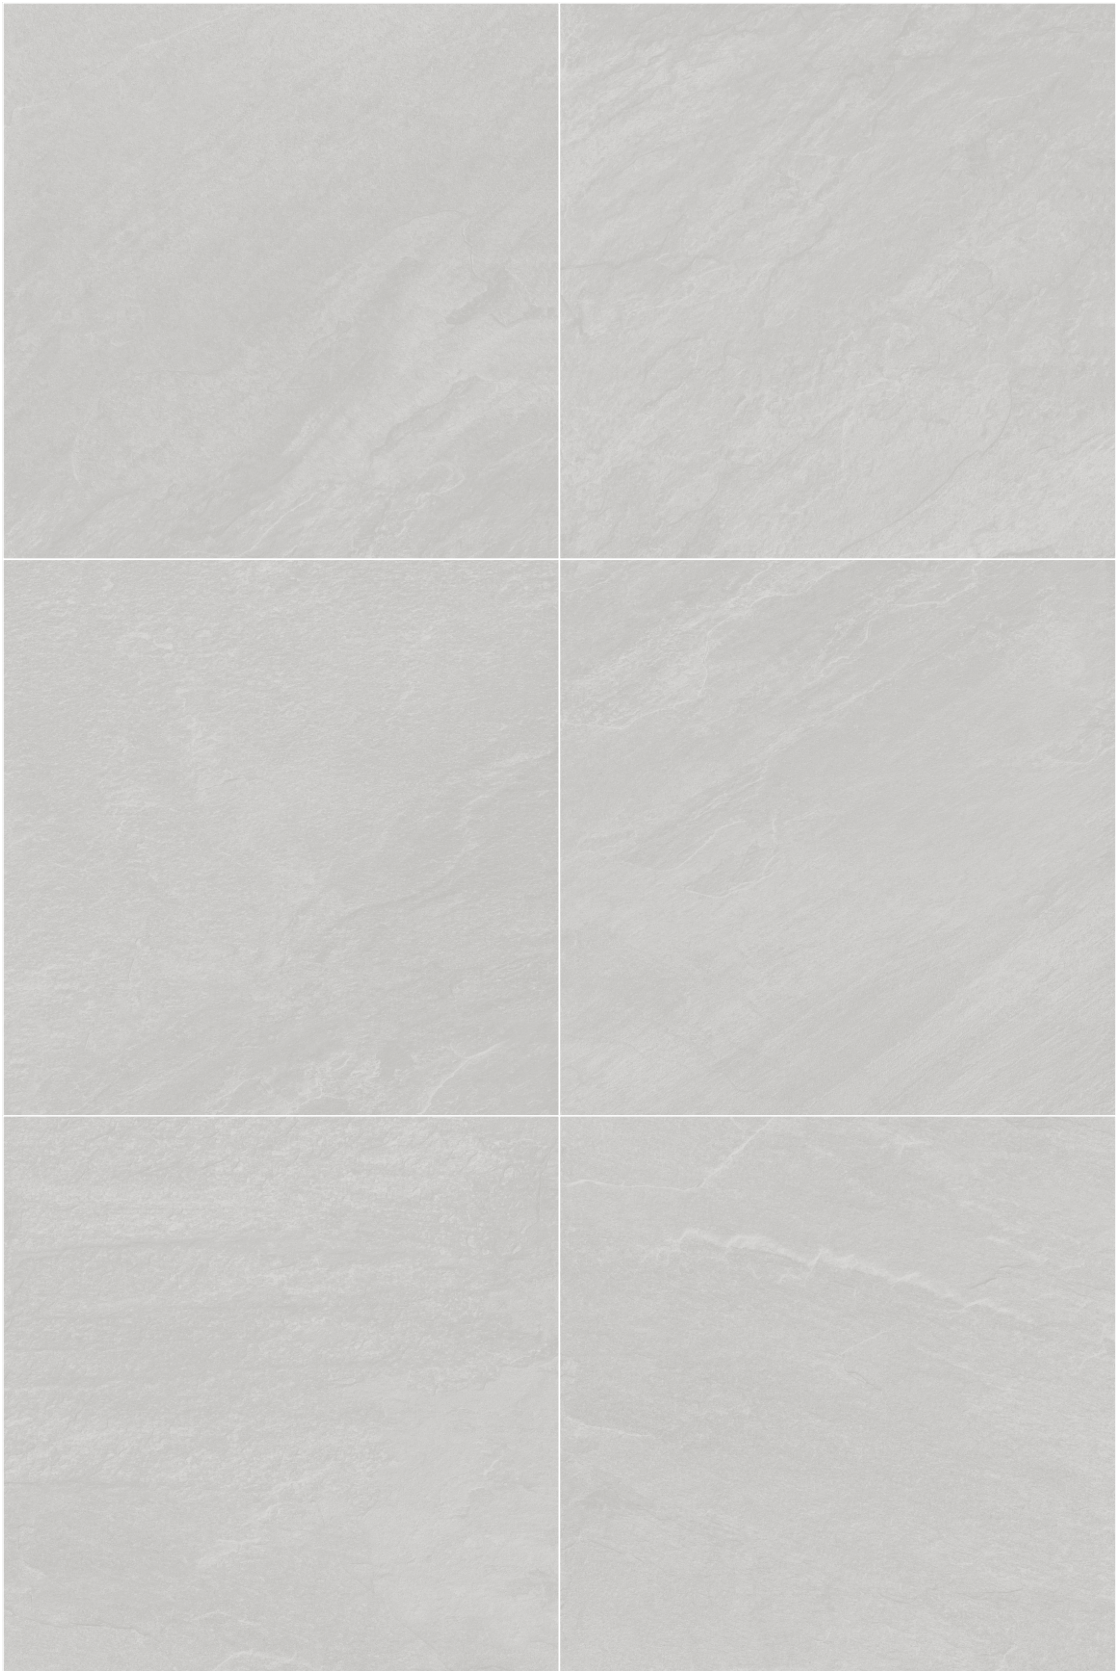

Ridge Ice

6 Phases

600x600MM

Ridge Series (Matt Punch)




Ridge Gris


6 Phases

600x600MM

Flora Series (Matt)

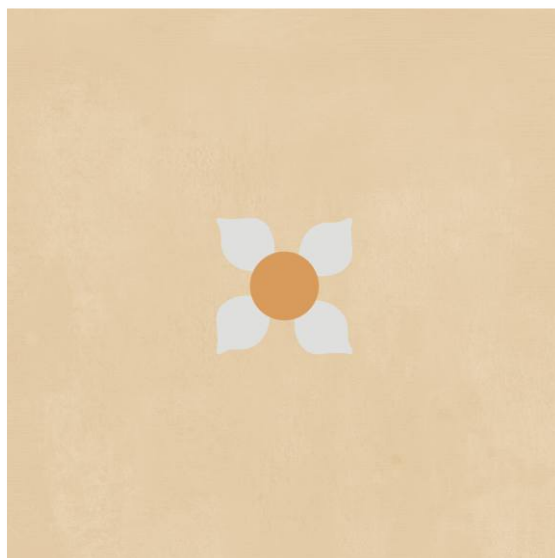


Flora Crema

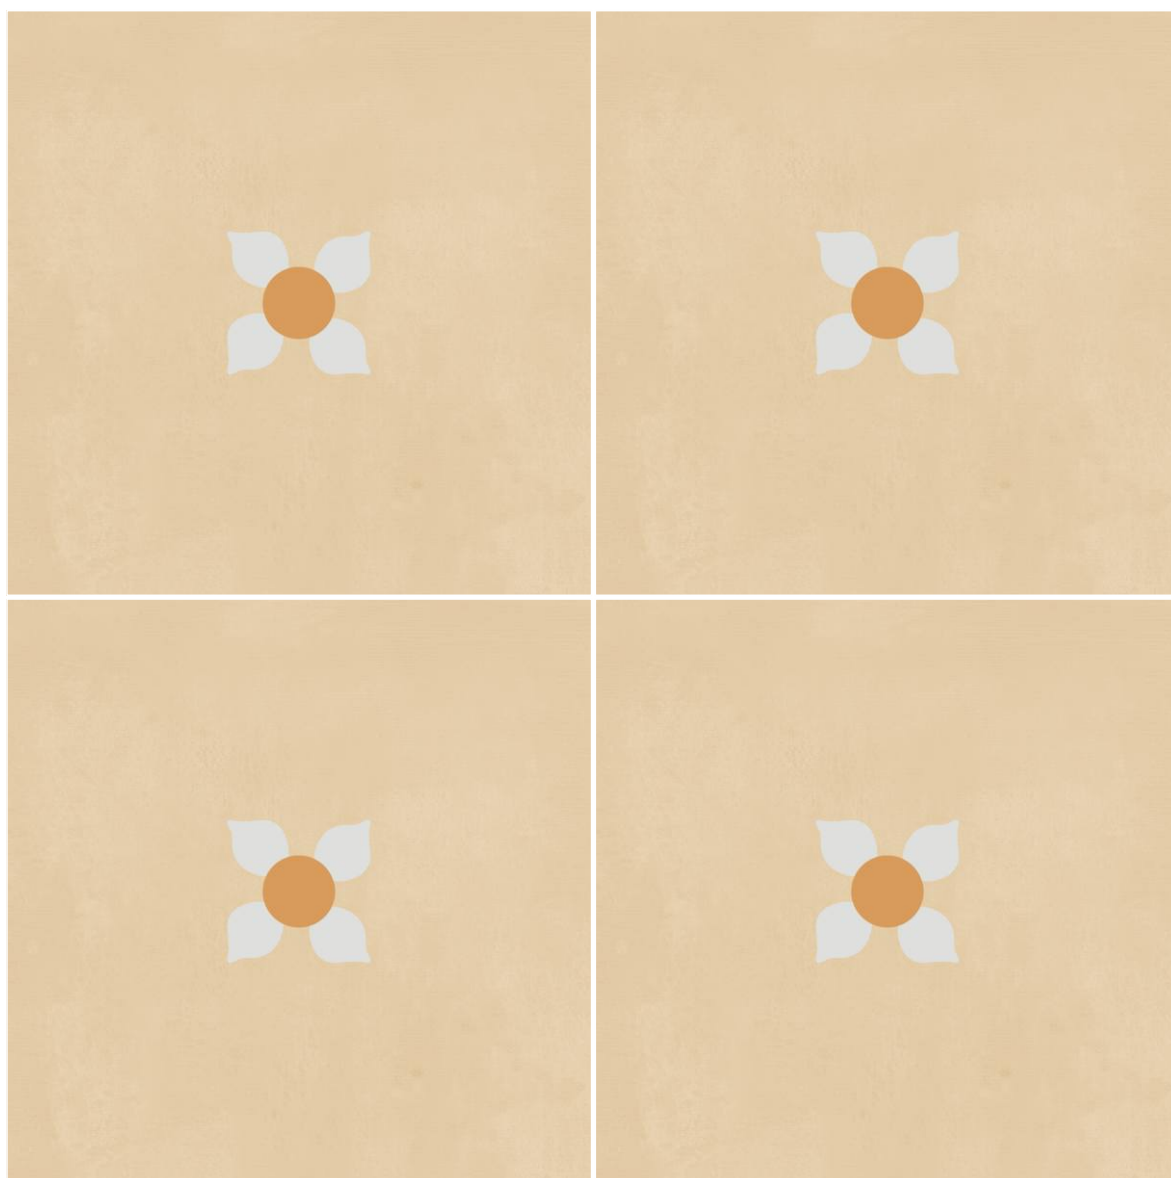




600x600MM

Flora Series (Matt)

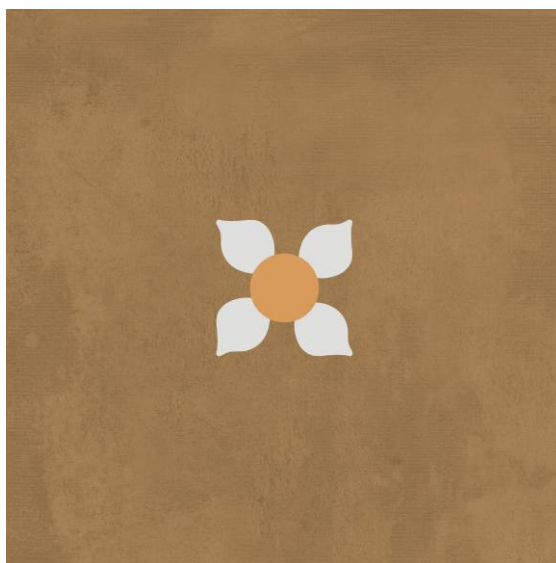


Flora Caffè

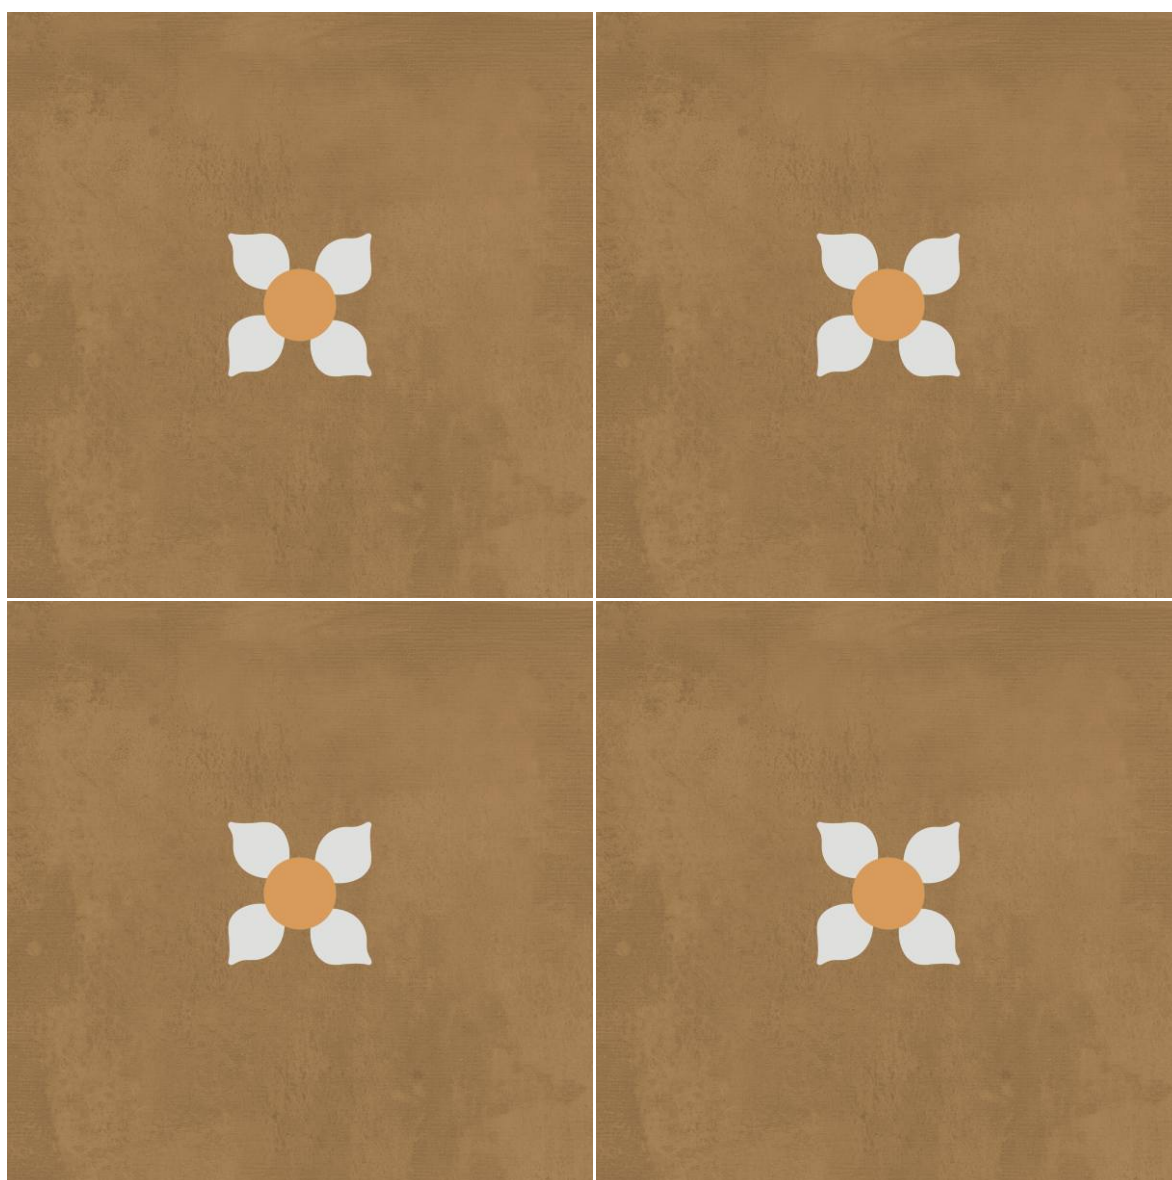


600x600MM

Flora Series (Matt)

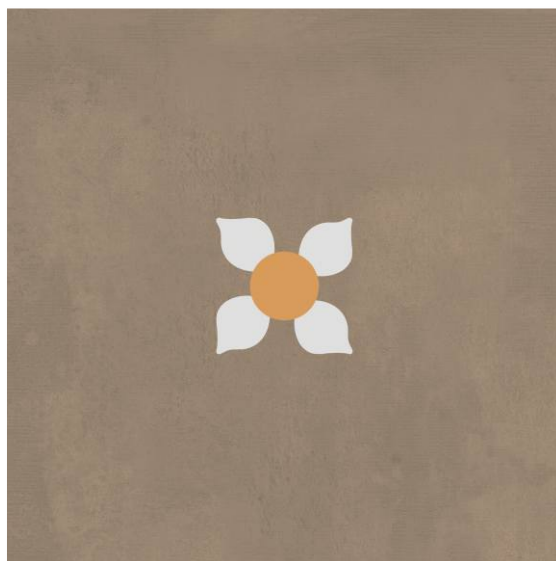


Flora Verde

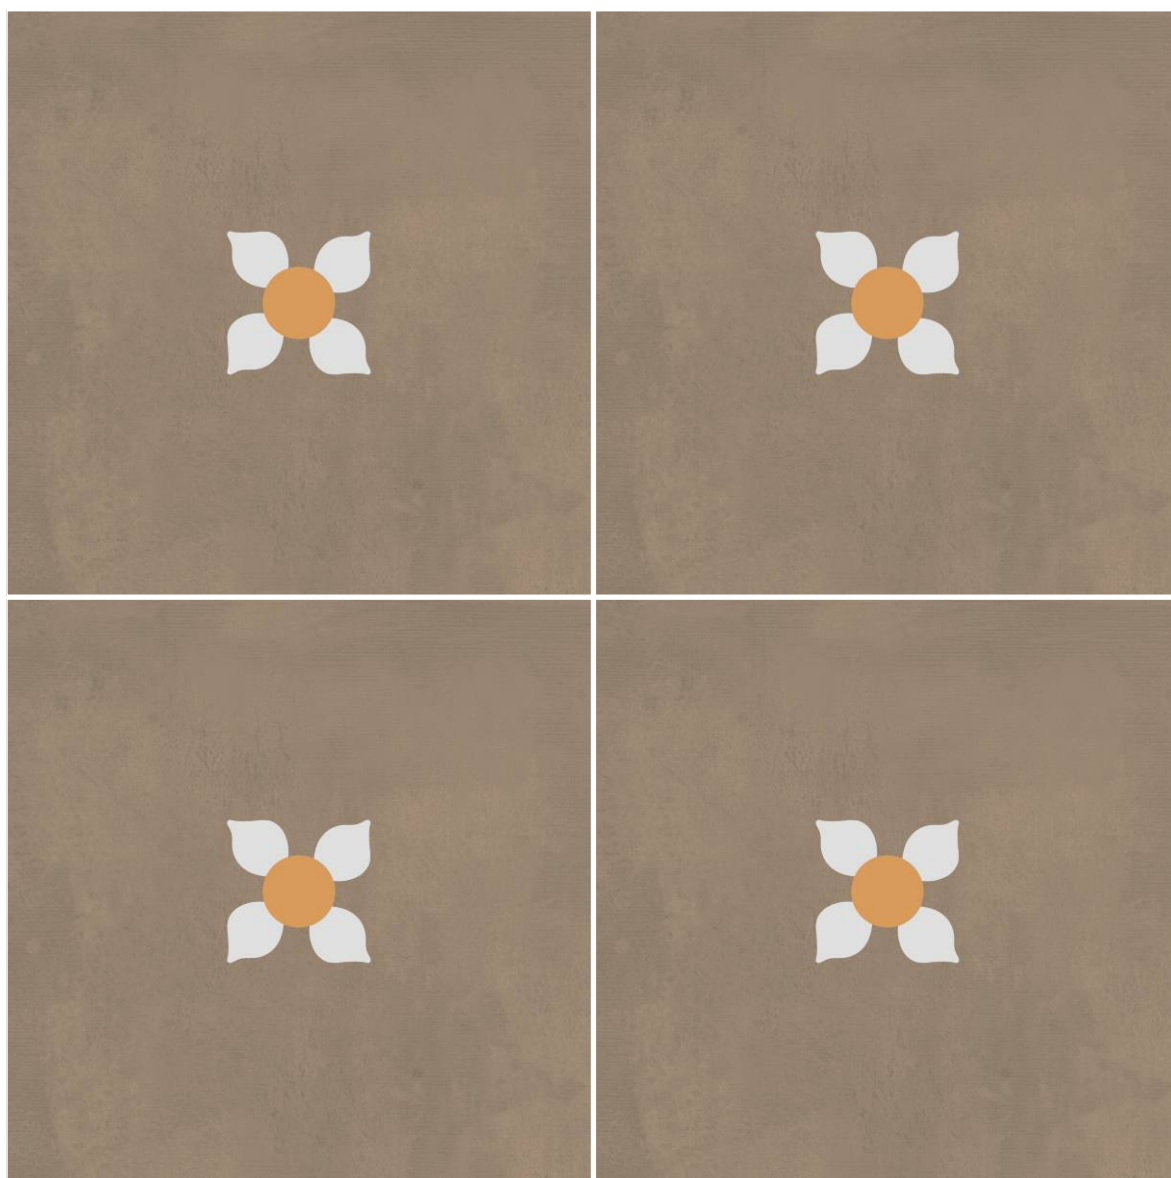


600x600MM

Flora Series (Matt)

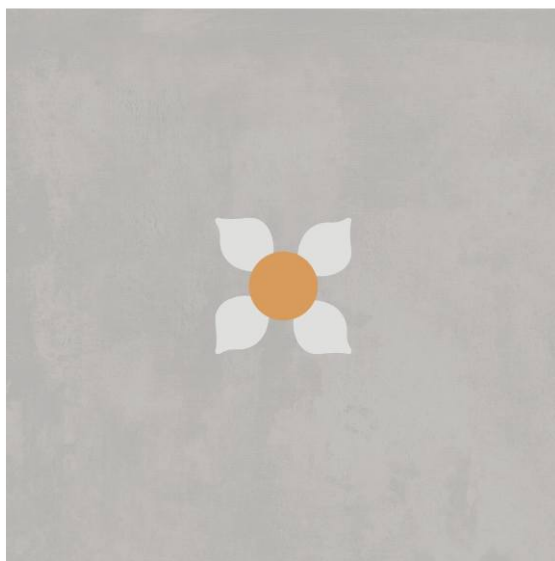

Flora Ice

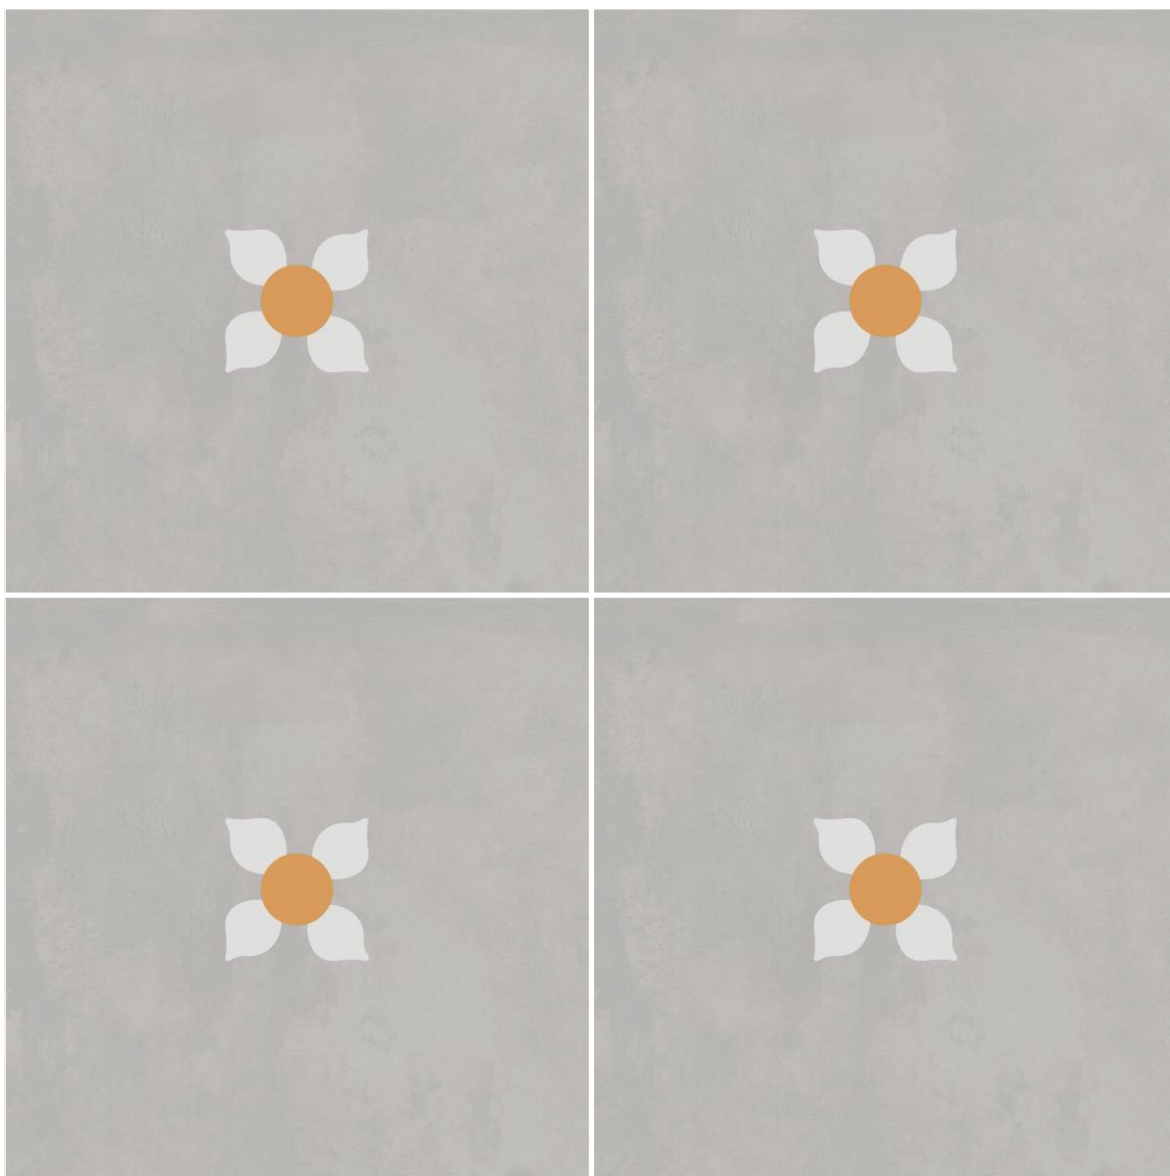





Flora Ice

600x600MM

Flora Series (Matt)

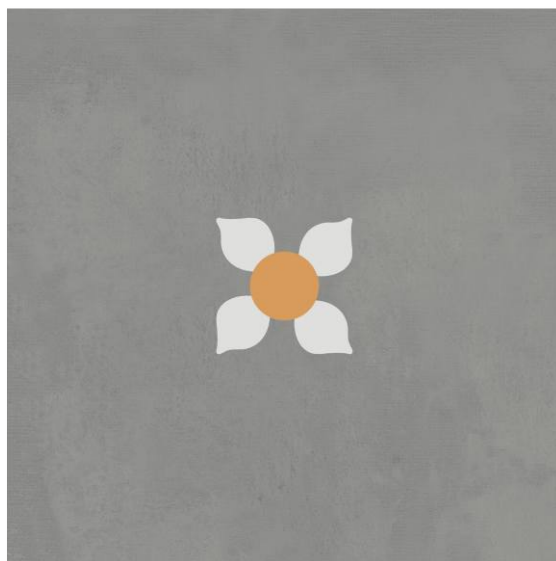


Flora Gris

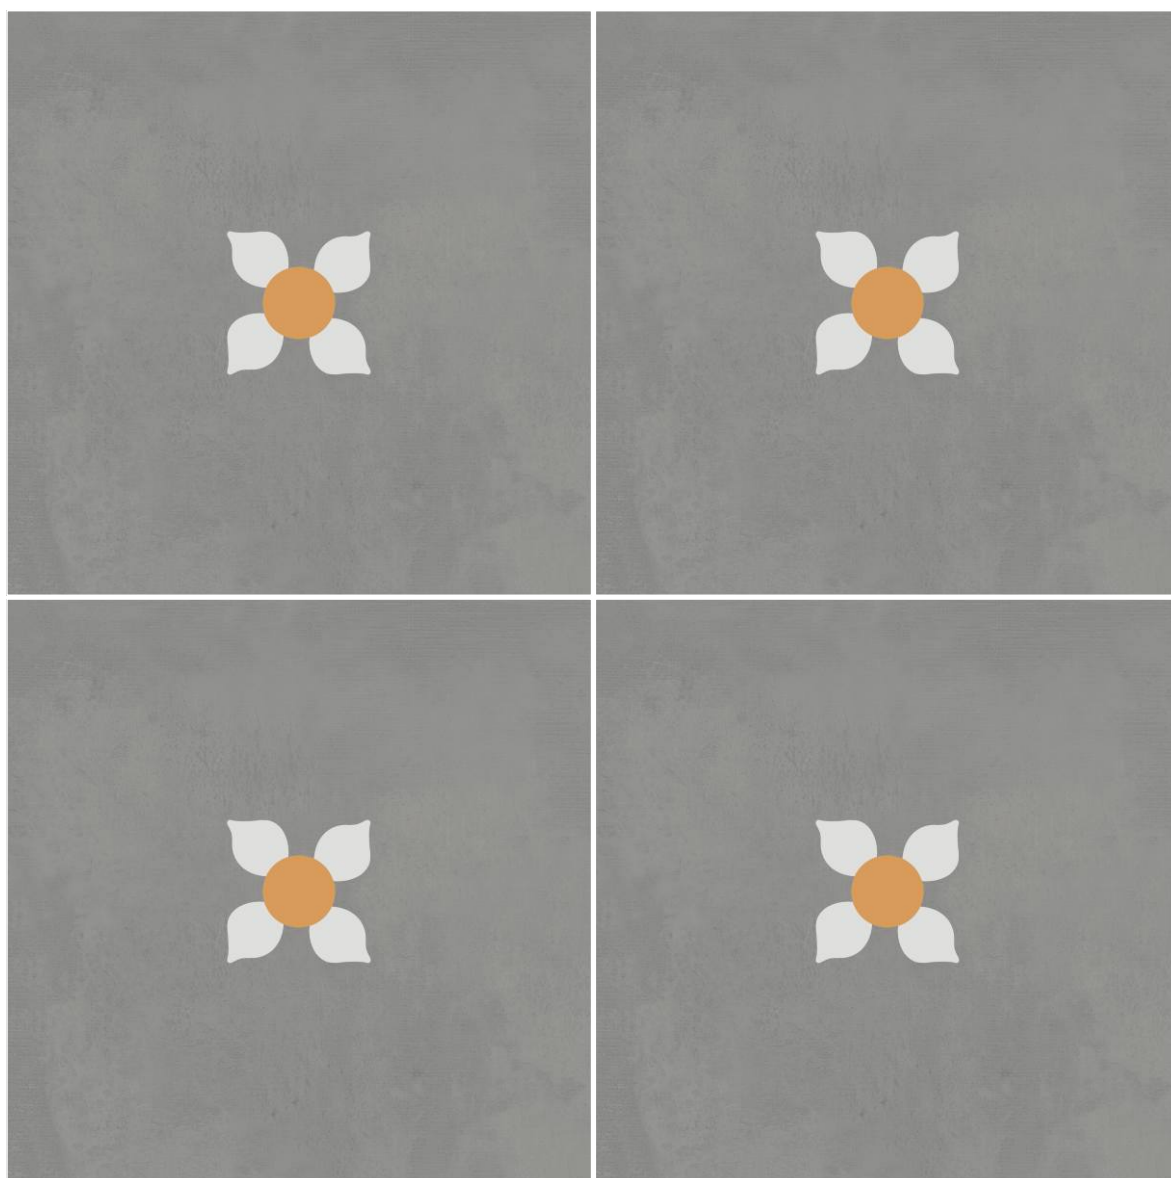


600x600MM

Flora Series (Matt)

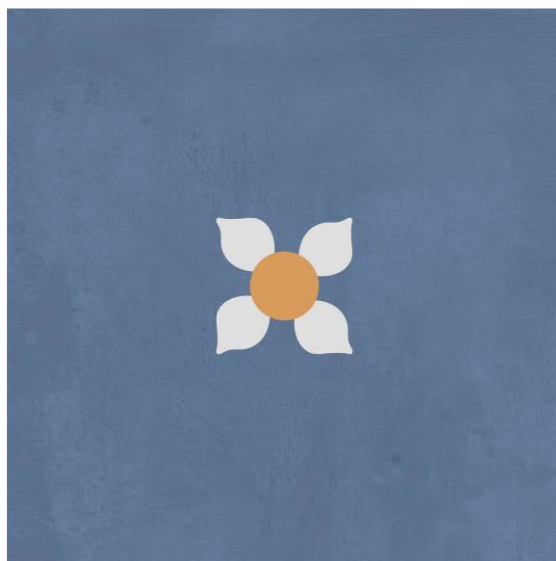


Flora Azul

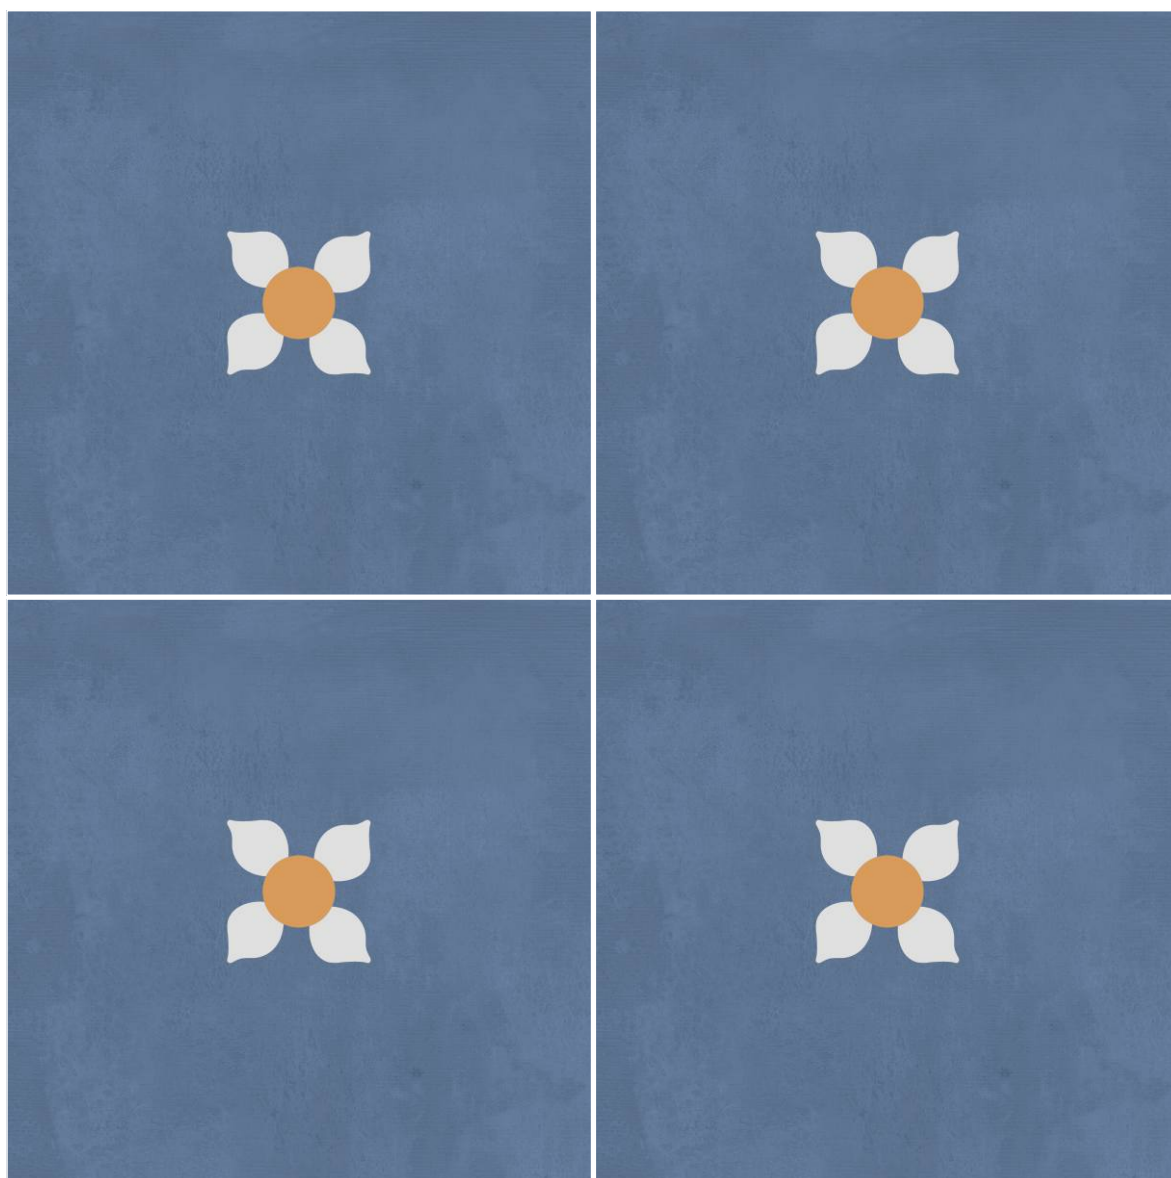


600x600MM

Flora Series (Matt)

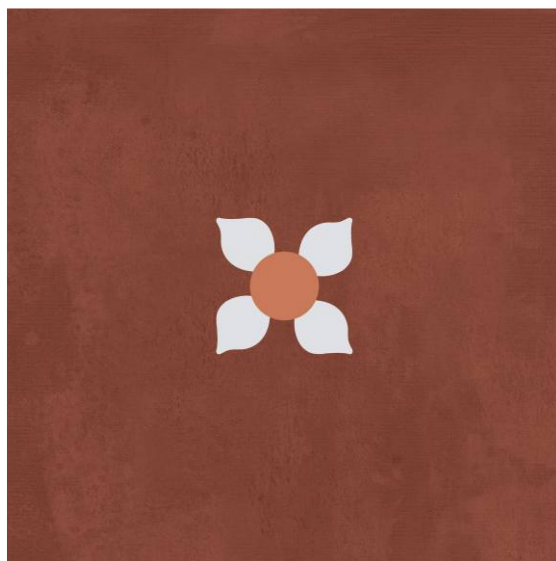

Flora Cotto

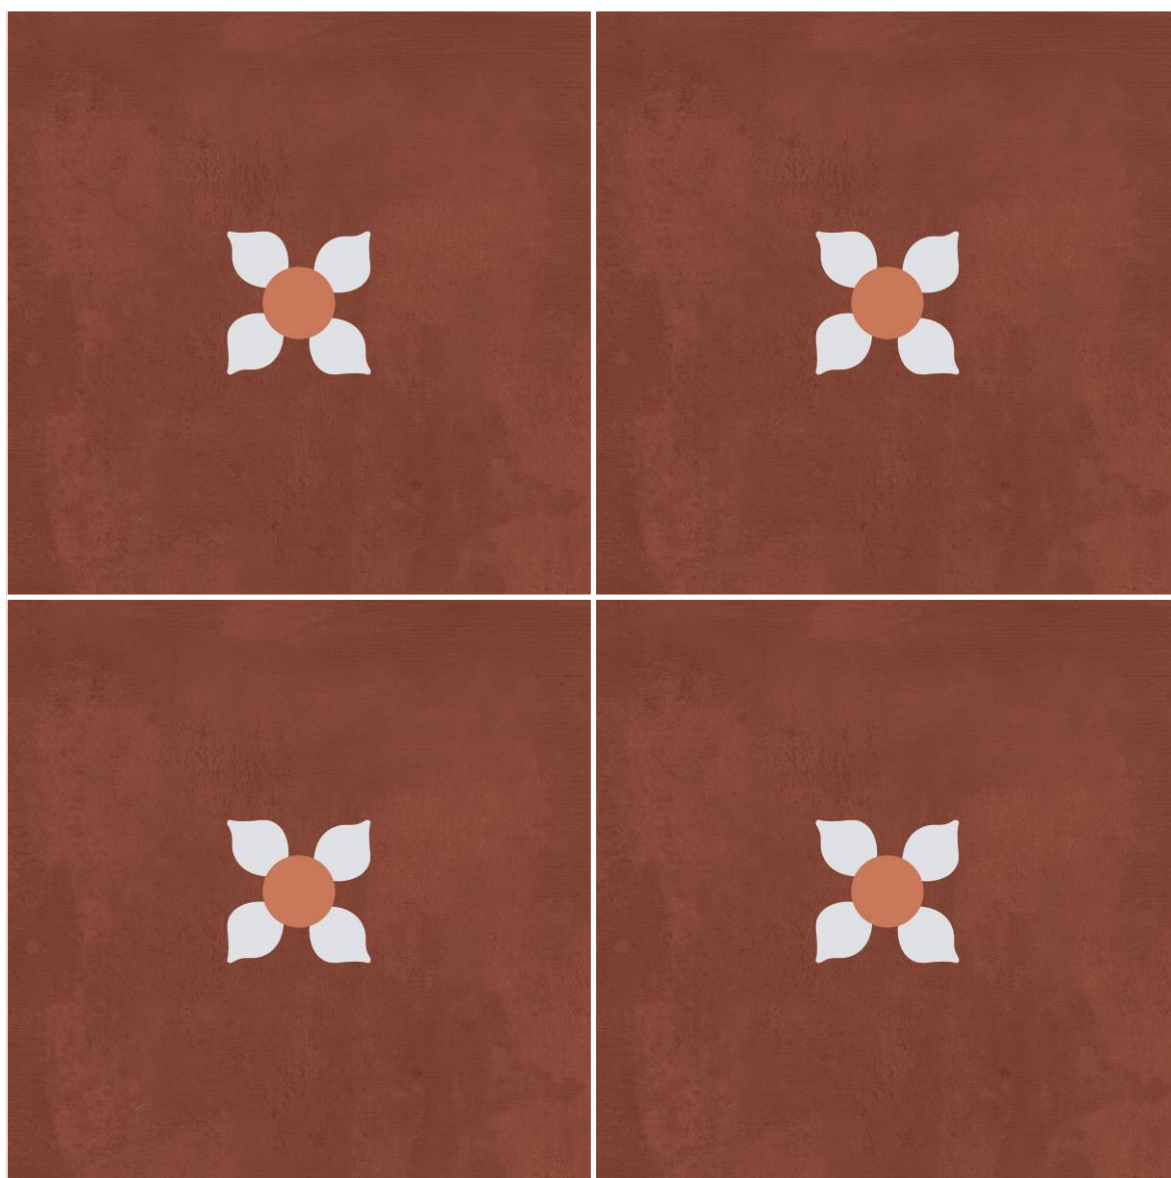



Flora Cotto

TECHNICAL SPECIFICATIONS

Characteristics		Euro Standards En-177 Group B	Victory Value 600x600mm
A DIMENSIONS & SURFACE QUALITY			
1	Deviation in Length	+/- 0.5%	+/- 0.2%
2	Deviation in Thickness	+/- 5%	+/- 4%
3	Straightness of Sides	+/- 0.5%	+/- 0.2%
4	Rectangularity	+/- 0.6%	+/- 0.25%
5	Surface Flatness	+/- 0.5%	+/- 0.3%
6	Surface Quality	Min 95%	Min 95%
B PHYSICAL PROPERTIES			
1	Water Absorption	3< EU	3-6%
2	Module of Rupture N/mm ²	>22	>28 N/mm ²
3	Scratch Hardness (MOHS)	MIN 5	MIN 5
4	Thermal Expansion	Max - $9 \times 10^{-6} \text{K}^{-1}$	Conforms to the standards
5	Thermal Shock Resistance	Required	Conforms to the standards
6	Crazing Resistance	Required	Conforms to the standards
7	Abrasion Resistance	Required	Conforms to the standards
C CHEMICAL PROPERTIES			
1	Resistance to Staining	Min Class 2	Min Class 2
2	Resistance to House Chemicals	Min class B	Min class B
3	Resistance to Acids and Alkalies	Required	Required

PACKING DETAILS

Size	Pcs. / Box	Area Covered (Approx.)	Weight per Box (Approx.)
600x600mm	04 Pcs.	1.44 Sq.mtr.	26.50 Kg.

Note :

- ▶ There may be difference in the colors, please see the actual tiles before placing order.
- ▶ No claims of what so ever are entertained after fixing.



Victory Ceratech Pvt. Ltd.

AN ISO 9001 : 2015 CERTIFIED COMPANY

303, Camps Corner-II, Near Prahladnagar Garden, Satellite, Ahmedabad-380015, INDIA.

Ph : +91 79 40266000, info@victorytiles.com, www.victorytiles.com

